

# TYING WITH STRENGTH

**hi-fi**<sup>TM</sup>  
HIGH-STRENGTH SUTURE

High performance fiber for superior fixation

Exceptional strength for knot tying

Enhanced feel for suture passing

Unique construction for low-profile knots




This product contains Dyneema Purity. Dyneema Purity is a registered trademark of DSM Dyneema B.V. or an affiliate of Koninklijke DSM N.V.

**CONMED**  
LINVATEC


# Hi-Fi® High-Strength Suture

## ORDERING INFORMATION

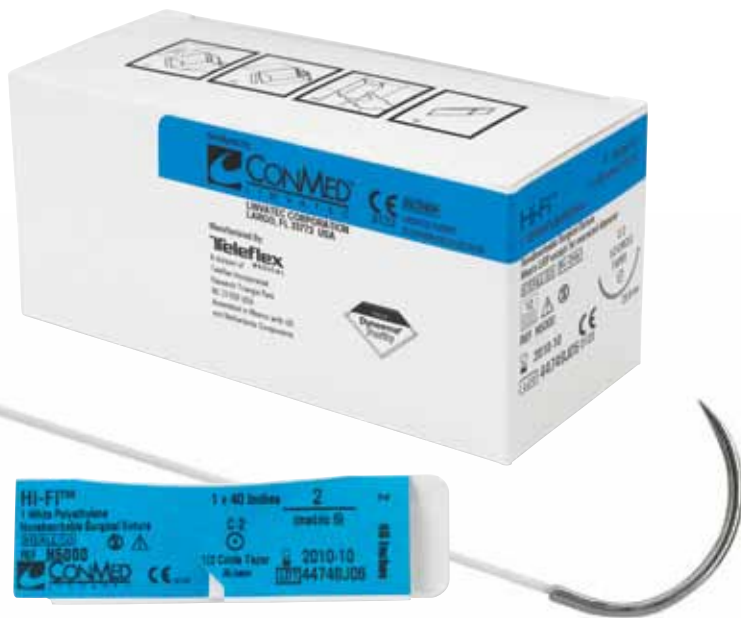

CAT NO.	DESCRIPTION	QUANTITY
H5000	#2 Hi-Fi® High Strength Suture, 40 in. single white strand, C-2 ½ in. circle, tapered needle	12/box
H5100	#2 Hi-Fi High Strength Suture, Two 40 in. strands, (white and white with blue strip), C-2 ½ in. circle, tapered needles	12/box
H5120	#2 Hi-Fi High Strength Suture, 36 in. single blue and white strand, no needle	12/box
H5130	#2 Hi-Fi High Strength Suture, 36 in. single white strand, no needle	12/box
H5150	#2 Hi-Fi High Strength Suture, 36 in. single black and white strand, no needle	12/box
H5200	#5 Hi-Fi High Strength Suture, 36 in. single blue and white strand, HSCX48 ½ in. cutting needle	12/box
H5250	#5 Hi-Fi High Strength Suture, 36 in. single blue and white strand, no needle	12/box
H5300	#0 Hi-Fi High Strength Suture, 36 in. single blue and white strand, C-4 ½ in. tapered needle	12/box
H5400	#0 Hi-Fi High Strength Suture, 36 in. single blue and white strand, HRT22 ½ in. diamond point needle	12/box
H5500	#2-0 Hi-Fi High Strength Suture 36 in. single blue and white strand, HR20 ½ in. tapered needle	12/box
H5600	#2-0 Hi-Fi High Strength Suture, 36 in. single blue and white strand, HRT20 ½ in. diamond point needle	12/box

### USP Knot Pull Test

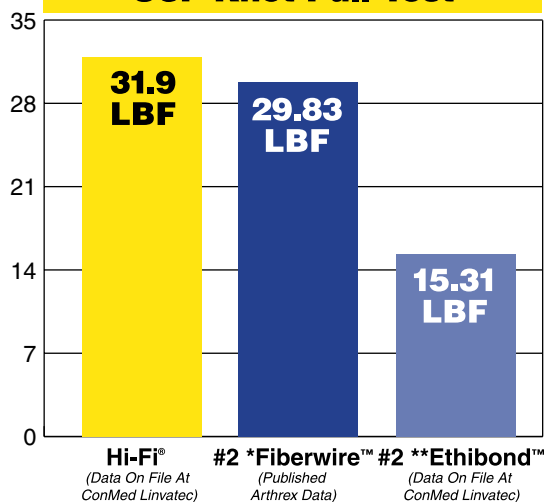

\*FIBERWIRE is a registered trademark of Arthrex, Inc.  
 \*\*ETHIBOND is a registered trademark of Johnson & Johnson Corporation

#### CONMED CORPORATION PRODUCT AREAS:

ARTHROSCOPY • ELECTROSURGERY • ENDOSCOPY • ENDOSURGERY • GASTROENTEROLOGY • INTEGRATED SYSTEMS • PATIENT CARE • POWERED INSTRUMENTS • PULMONOLOGY



11311 Concept Boulevard  
 Largo, FL 33773-4908  
 (727) 392-6464  
 Customer Service: 1-800-237-0169  
 FAX: (727) 399-5256  
 International FAX: +1 (727) 397-4540  
 email: customer\_service@linvatec.com  
 www.linvatec.com